



fireXdirect.com

1.844.230.8400

sales@firexdirect.com



4

EMERGENCY RESPONSE PRODUCTS

Tough As The Job They're Designed For



5009XL

Offering quality and economy, **Shelby's GENERAL PURPOSE GLOVES** are made from wash-and-wear tan pigskin for extra toughness. Gunn cut with **Kevlar®** thread, they have seamless palms, wing thumbs, and **Nomex®** wristlets for extra flame resistance. Meets CAL and Federal OSHA requirements.

P/N	DESCRIPTION	SIZE
5009L	General Purpose Gloves	LG
5009XL	General Purpose Gloves	XL



2500L

PROTECTIVE GEAR

With the help of **Kevlar** and **Armortex**, **ProFlex® FIRE & RESCUE PERFORMANCE GLOVES**, from **Ergodyne**, can be used for extrication rescues and other jobs that push the limits of endurance. They are reinforced at the fingertip gripping zones to retain a tighter hold. EVA padding cuts down on shock and impact to the hands, while stretchable spandex shells make them comfortable to wear. CE EN388 4243. Lime/Black.

P/N	DESCRIPTION	SIZE
2500M	Fire & Rescue Gloves	MD
2500L	Fire & Rescue Gloves	LG
2500XL	Fire & Rescue Gloves	XL



5228GFDPL

Shelby® STRUCTURAL FIREFIGHTING GLOVES are made of fire-retardant, heat-resistant, heavyweight **Koala®** tanned cowhide for maximum performance. They are sewn with **Kevlar®** thread, have fleece liners, and use **Gore** glove barrier fabric to keep them thermally stable. Other features include wing thumbs, wraparound index fingers, gauntlets, and **Shelby FDP** ("Fit + Durability = Performance"). Gunn cut. Meets NFPA 1971. Midnight Blue.

P/N	DESCRIPTION	SIZE
5228GFDPs	Firefighting Gloves	SM
5228GFDPm	Firefighting Gloves	MD
5228GFDP L	Firefighting Gloves	LG
5228GFDPXL	Firefighting Gloves	XL

Ergodyne's hi-vis GloWear® PUBLIC SAFETY VESTS

feature two-tone, five-point breakaway designs with Level 2 ANSI-compliant tape set on 4½" contrasting color backgrounds. They come with one multi-division pocket on the inside and radio tabs/holders. Used for operations at local, state, and federal levels, these vests help quickly identify people working in emergency response. ANSI 207 compliant. Lime.

P/N	DESCRIPTION	SIZE
PSV1	Public Safety Vest	LG/XL
PSV2	Public Safety Vest	2XL/3XL
PSV3	Public Safety Vest	4XL/5XL



PSV1

The **Cobra™ Classic™ FIREFIGHTING HOOD**, from **PGI**, offers serious protection without sacrificing comfort. The hood accomplishes this by blending **Nomex/Lenzing FR** for superior flame and heat resistance with a **Comfort-Plus™** liner for unbeatable breathability, comfort, and moisture-wicking properties. Flat stitched seams won't bunch or dig into your skin, and its extra-heavyweight elastic face opening stretches to a full 16" for easy donning and a snug fit—with or without an SCBA mask. Coverage extends to lower neck. UL classified to NFPA 1971. One size. White.

P/N	DESCRIPTION
BZ33	Firefighting Hood



BZ33

From **Bullard**, the **PX Series FIREFIGHTING HELMET** offers life-saving head protection in a thermoplastic design for optimum impact and penetration resistance. Reliable, under repeated heat exposure, it comes standard with the **Sure-Lock®** ratchet headband suspension for easy adjustment and superior comfort and an optically correct face shield. Certified to NFPA 1971 Standard on Protective Ensembles for Structural Fire Fighting. Yellow.

P/N	DESCRIPTION
PXY	Firefighting Helmet



PXY

Designed for wildland firefighting and technical rescue operations **StrikeTeam XTO™ GOGGLES** are an ideal choice for numerous other situations requiring dependable eye protection. They come with a **Speed-Clip™** quick strap adjustment, face padding, and a replaceable clear lens and tear-off covers. They are nearly indestructible, thanks to polycarbonate construction, and fog-free with full-filter ventilation. Goggles will fit over most eyeglasses and are ANSI Z87.1 and NFPA 1500 compliant. Black frame, clear lens.

P/N	DESCRIPTION
ESS1	XTO Goggles



ESS1

4 EMERGENCY RESPONSE PRODUCTS



LBB10

Black Diamond® 16" RUBBER FIRE BOOTS offer incredible comfort with stitched-down linings that do not pull out. Their nonslip heels offer a better, more accurate fit, while their lower midsoles are coated with 9.5 mm felt for added comfort. Other standard features include steel toes and shanks for added protection and lug outsoles for a better purchase on all types of terrain. Boots are open cell foam insulated and meet or exceed NFPA 1971, ANSI Z41, and CSA Z195 requirements. Medium width.

P/N	DESCRIPTION	SIZE
LBB8	16" Insulated Fire Boots	8
LBB9	16" Insulated Fire Boots	9
LBB95	16" Insulated Fire Boots	9.5
LBB10	16" Insulated Fire Boots	10
LBB11	16" Insulated Fire Boots	11
LBB12	16" Insulated Fire Boots	12
LBB13	16" Insulated Fire Boots	13
LBB14	16" Insulated Fire Boots	14

ACCESSORIES

P/N	DESCRIPTION
HBS	Fully Adjustable, Red "H" Back Suspenders
LGB	Firefighter's Gear Bag, Heavy-Duty, Water-Resistant Nylon, 27"L x 18"H x 12"W



HBS



LGB

PUBLIC SAFETY LIGHTING

Streamlight's KEYMATE is big on power, thanks to its high-intensity LED that lasts 100,000 hours. Its anodized aluminum casing is virtually indestructible, while four high-capacity alkaline button cell batteries (included) power it for up to 96 hours. 2³/₁₆". Black.

P/N	DESCRIPTION
SL72001	KeyMate Flashlight 10 Lumens; 96 hr Runtime
SL72030	KeyMate Replacement Batteries, Pkg/4



SL72001



73001SL

Super bright, **Streamlight's NANO LIGHT** is made from aircraft-grade aluminum for extra toughness. It provides up to eight hours of run time, with a 100,000-hour white LED, on four coin cell batteries (included). Comes with a clip to attach it to a key chain, a tool belt, and more. 1¹/₂". Black.

P/N	DESCRIPTION
73001SL	Nano Flashlight 10 Lumens; 8 hr Runtime



P1810R

Pelican's LED KEYCHAIN LIGHTS are lightweight with aluminum construction and twist-on activation. They are IPX4 water resistant and come with four coin cell batteries. Lights offer 16 lumens and 8-hour runtimes. 1¹/₂".

P/N	DESCRIPTION
P1810BK	Keychain Light, Black
P1810BL	Keychain Light, Blue
P1810R	Keychain Light, Red

Rechargeable Or Alkaline

The bright, right-angled **Survivor® LED FLASHLIGHT**, from **Streamlight**, is a lightweight, hand-held flashlight designed for use in hazardous situations. It uses **C4®** LED technology for exceptional power. The **Survivor LED** is IPX4 water resistant and has microprocessor-controlled High and Low lighting modes as well as a Moonlight and Emergency Flash mode. 175 lumens (High mode). 7¹/₁₆"L x 2⁷/₈"H x 2⁷/₈"W.

P/N	DESCRIPTION
SL90513	Survivor LED Flashlight, Rechargeable, Yellow Includes: 120 VAC, 12V Steady Charger; 13 hr Runtime (Low Mode)
SL90503	Survivor LED Flashlight, Rechargeable, Orange Includes: 120 VAC, 12V Steady Charger; 13 hr Runtime (Low Mode)
SL90500	Survivor LED Flashlight (Only), Rechargeable, AC/DC, Orange 13 hr Runtime (Low Mode)
SL90541	Survivor LED Flashlight (Only), Alkaline, Yellow 15 hr Runtime (Low Mode)
SL90540	Survivor LED Flashlight (Only), Alkaline, Orange 15 hr Runtime (Low Mode)



SL90503

The **E-Spot® Litebox® RECHARGEABLE LANTERN**, from **Streamlight**, features three shockproof **C4®** LEDs with a 50,000-hour life, while jumper selectable High and Low settings allow more light output or longer run time. It is tough, too, thanks to ABS thermoplastic construction with a rubberized impact bumper, lens ring, and cushioned grip handle. IPX4 water resistant. 11¹/₂"L x 7"H x 5³/₃₂"W. Orange/Black.

P/N	DESCRIPTION
SL45851	Litebox Standard System Flashlight Includes: 120 VAC, 12V Chargers, Shoulder Strap & Mounting Rack; 540 Lumens (High Mode); 15 hr Runtime (Low Mode)
PRB612	6V, 12 Ah Battery For SL45851

SEE PAGE 159



SL45851

Just like **Streamlight's Litebox**, these **E-Spot® Firebox® RECHARGEABLE LANTERNS** come with three shockproof **C4®** LEDs that offer 50,000 hours of service. Jumper selectable High and Low settings are standard as are ABS thermoplastic housings, rubberized impact bumpers, lens rings, cushion-grip handles, and toggle switches for easy operation with gloves. Where **Firebox** lights differ is with their extremely bright blue taillights—Steady On or Blinking. IPX4 water resistant. 11¹/₂"L x 7"H x 5¹/₈"W.

P/N	DESCRIPTION
SL45861	Firebox Standard System Flashlight, Orange/Black Includes: 120 VAC, 12V Chargers, Shoulder Strap & Mounting Rack; 540 Lumens (High Mode); 15 hr Runtime (Low Mode)
SL45877	Firebox Standard System Flashlight, Yellow/Black Includes: 120 VAC, 12V Chargers, Shoulder Strap & Mounting Rack; 540 Lumens (High Mode); 15 hr Runtime (Low Mode)
PRB612	6V, 12 Ah Battery For SL45861 & SL45877

SEE PAGE 159



SL45861



SL45877



SL68202

Streamlight's 4AA ProPolymer® LED CLASS I, DIVISION 1 FLASHLIGHT is waterproof, tough, and dependable. This non-conductive flashlight features super-bright LEDs as well as a non-slip grip and polymer case. Uses four AA-cell alkaline batteries (included). 6¹/₂". Yellow/Black.

P/N	DESCRIPTION
SL68202	ProPolymer Flashlight 67 Lumens; 155 hr Runtime
TFAAB	AA Alkaline Batteries, Pkg/4
E91BP4	Max AA Alkaline Batteries, Pkg/4

SEE PAGE 159
SEE PAGE 159



SL65018

Streamlight® Stylus® PENLIGHTS clip to your shirt pocket and feature a 100,000-hour LED that you can switch from Constant-On to Momentary Blink with the click of a button. Durably built, they have knurled anodized aluminum bodies and are IPX4 water resistant. Uses three AAAA-cell batteries (included). Black.

P/N	DESCRIPTION
SL65018	Stylus Penlight, 6 ³ / ₁₆ " 11 Lumens; 24 hr Runtime
SL65618	Stylus Reach Penlight, 14" (Extended), 6 ³ / ₄ " (Retracted) 11 Lumens; 24 hr Runtime
SL65030	Replacement AAAA Batteries, Pkg/6



SL65618

Energizer's Vision LED HEADLIGHT offers hands-free operation with two light modes that control brightness and runtime, making it up to four-times brighter than standard LEDs. It comes with a pivoting head, slide switch, and three AAA batteries. Impact resistant to 1 m. 1⁵/₈". Blue.

P/N	DESCRIPTION
HDA32E	Vision Headlight 100 Lumens; 7 hr Runtime
TFAAAB	AAA Alkaline Batteries, Pkg/4

SEE PAGE 159



HDA32E

Streamlight's Trident® and Enduro® LED HEADLAMPS

provide superior hands-free lighting. The **Trident Headlamp** features four LEDs (one being a **C4**), a 90° tilting head, and three-way lighting for short, medium, and long distances (with Spot-to-Flood adjustment). The lightweight **Enduro Headlamp** features High and Low lighting modes, a 0.5 W high-flux LED, and O-ring sealed construction. Both headlamps have polycarbonate bodies and adjustable elastic/rubber combo head straps. **Trident** is IPX4 water resistant. **Enduro** is IPX7 waterproof to 1m for 30 minutes. And each is impact resistant to 2 m. Three AAA batteries included.

P/N	DESCRIPTION
SL61050	Trident LED Headlamp, Orange/Black/Yellow, 1 ⁷ / ₈ " 80 Lumens (High Mode); 53 hr Runtime (Low Mode)
SL61400	Enduro LED Headlamp, Black, 1 ⁵ / ₈ " 50 Lumens (High Mode); 25 hr Runtime (Low Mode)
TFAAAB	AAA Alkaline Batteries, Pkg/4

SEE PAGE 159



SL61050



SL61400

 For Replacement Batteries, See Section 10.

Energizer's Vision HD PERFORMANCE METAL FLASHLIGHT comes with custom optics for exceptional direct and peripheral vision and is LED color aligned with natural daylight. It also comes standard with **One-Touch Digital Focus** and digital switching for High, Power-Saver, and Emergency Strobe modes. Made of commercial-grade aluminum alloy and includes six AA **Energizer® Max®** batteries. IPX4 water resistant and impact resistant to 1 m. Black.

P/N	DESCRIPTION
→ EPMZH61E	Vision HD Performance Metal Flashlight 1300 Lumens; 4 hr Runtime
TFAAB	AA Alkaline Batteries, Pkg/4

In a class by itself, the compact, super-bright **Stinger® FLASHLIGHT**, from **Streamlight**, is a lightweight, rechargeable, personal light that is virtually indestructible. Offering superior materials and craftsmanship, it is even serialized for positive identification. Standard features also include an LED charge-continuity indicator; a snap-in, universal-mount charger; and an anti-roll ring to keep it where you lay it. Its nickel-cadmium battery recharge up to 1000 times as well. IPX4 water resistant and impact resistant to 1 m. Black.

P/N	DESCRIPTION
→ SL75713	Stinger LED Flashlight w/ AC/DC Charger, 2 Holders 400 Lumens (High Mode); 7.25 hr Runtime (Low Mode)
SL75175	Replacement Battery For SL75713

This **EMERGENCY LIGHTING STATION**, from **Pelican**, is a self-contained photoluminescent beacon and flashlight, housed in a clear tamperproof case that is wall mountable. When mounted, (hardware included) it offers easy access during power outages and has a **Signaling** mode for search and rescue scenarios. Uses three AA-cell alkaline batteries (included). IPX8 submersible to 1 m. 6 1/8".

P/N	DESCRIPTION	
P3310ELS	Lighting Station 378 Lumens (High Mode); 202 hr Runtime (Low Mode)	
TFAAB	AA Alkaline Batteries, Pkg/4	SEE PAGE 159

BARRICADE TAPES

Our quality selection of **BARRICADE TAPE** is made of 2.5 mil polyethylene and comes in 3" x 1000' rolls for easy handling and storage. It can be tied, stapled, or nailed in place to secure sensitive areas and warn of physical hazards or dangerous situations. Yellow.

P/N	DESCRIPTION
SLYFL	"Fire Line Do Not Cross"
SLYPL	"Police Line Do Not Cross"
TH1000	Tape Holder
TH42003	Barricade Tape Dispenser

 For Additional Warning Tapes, See Section 5.






DJ50ANST



DJ50YHANST

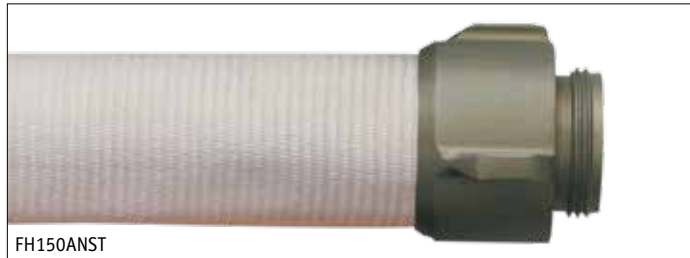

FH150ANST



BH150ANST



CG25



HH26



HK25

MUNICIPAL FIRE HOSE AND FITTINGS

Get the ultimate in high-performance with municipal-grade fire hose from **Brooks**. These durable **DOUBLE JACKET** and **YELLOW COATED FIRE HOSES** are constructed of 100% high-tensile-strength polyester yarns—both warp and filler—and lined with a high-tech E.P.D.M. tube, so they weigh less but last longer. Aluminum NST coupled.

P/N	DESCRIPTION	BOWL SIZE	WEIGHT COUPLED
DJ50ANST	50' x 1 1/2", DJ Hose	1 15/16"	18 lb
DJ2550ANST	50' x 2 1/2", DJ Hose	3"	34 lb
DJ50YHANST	50' x 1 1/2", YC Hose	1 15/16"	21 lb
DJ2550YHANST	50' x 2 1/2", YC Hose	3"	39 lb

This lightweight **FORESTRY HOSE** meets the USDA-US Forest Service Specification. Proof test pressure is 500 psi and service test is 250 psi. Aluminum NST coupled.

P/N	DESCRIPTION	BOWL SIZE	WEIGHT COUPLED
FH150ANST	50' x 1", Forestry Hose	1 1/4"	7 lb
FH1100ANST	100' x 1", Forestry Hose	1 1/4"	11 lb

Designed for structural, vehicle, grass, and forestry firefighting, **Reel Lite BOOSTER HOSE** features single jacket construction from virgin spun polyester warp yarn that is woven in a twill weave. Polyurethane lined, it is **Wear Guard** treated for extra toughness. Hose has a proof test pressure of 600 psi and a service test of 300 psi. Aluminum NST coupled. Meets NFPA 1961.

P/N	DESCRIPTION	BOWL SIZE	WEIGHT COUPLED
BH150ANST	50' x 1", Booster Hose	1 1/2"	30 lb
BH1100ANST	100' x 1", Booster Hose	1 1/2"	60 lb

For Additional Hose Options, See Section 3.

Our selection of **HYDRAULIC TEST EQUIPMENT** features a variety of highly engineered products and instruments to handle your calculation needs. The **Line** and **Cap Gauges** are easy to attach to hydrants, valves, etc., and provide a quick check of water pressure. The handheld **Pitot Gauge** and **Hydrant Test Kit** offer convenient methods of checking straight tip nozzle and hydrant pressures quickly and accurately.

P/N	DESCRIPTION
CG25	Cap Gauge (0–300 psi), 2 1/2" NST
LG25	Line Gauge (0–300 psi), 2 1/2" NST
HH26	Pitot Gauge (0–160 psi)
HK25	Hydrant Test Kit (0–160 psi), 2 1/2" NST

MUNICIPAL HAND TOOLS

Designed for today's fire department connections, these popular **WRENCHES** cover a variety of sizes in both storz and threaded adapters (pin or rocker lugs).

P/N	DESCRIPTION
STW	Storz x Universal Spanner, Alum Fits 4"-5" Storz & 1½"-3" Rocker Lugs
STH	Storz Spanner Wrench Holder
W570	Universal Spanner Wrench, Alum Fits 1½"-3" Pin/Rocker Lugs
W580	Standard Hydrant/Spanner Wrench, Steel/Ductile Iron Fits 1½"-6" Pin/Rocker Lugs
W575	Heavy-Duty Hydrant/Spanner Wrench, Steel/Ductile Iron Fits 1½"-6" Pin/Rocker Lugs
K48	Hydrant/Spanner Wrench Holder (Only)
AFS	Folding Pocket Spanner Wrench, Plastic Fits Pin/Rocker Lugs thru 4"

This collection of **MULTI-PURPOSE RESCUE TOOLS** features the **Res-Q-Rench** that is five tools in one—universal spanner, pry tool, window punch, seat belt cutter, and gas shutoff. The small but effective **ResqMe®** tool easily shatters tempered glass and cuts through safety belts in seconds. A must-have for service techs and first responders alike.

P/N	DESCRIPTION
RQR	Res-Q-Rench Fits 4", 5" Storz & Rocker Lugs thru 3"
RST1	ResqMe Tool

These **RESCUE TOOLS**, from **Channellock**, have a spanner wrench that works on storz and rocker lug couplings (up to 5"). There is also a tool steel punch to shatter safety glass, a pry bar for doors and windows, a gas shutoff, and a cable cutter with hardened steel edges that easily shear through soft metal or battery cables. Their narrow profiles are ideal for tight places.

P/N	DESCRIPTION
TL87	9" 87 Rescue Tool
TL89	11" 89 Rescue Tool

Our collection of municipal-grade **FIRE AXES** includes four different styles with or without pick heads and solid hickory or yellow fiberglass handles—all with 6 lb heads. Optional mounting bracket and hooks available separately.



P/N	DESCRIPTION
407Y*	Flat Head Fire Axe w/ 34" Fiberglass Handle
D406M	Pick Head Fire Axe w/ 36" Hickory Handle (Domestic)
D406Y	Pick Head Fire Axe w/ 36" Fiberglass Handle (Domestic)
D407M	Flat Head Fire Axe w/ 36" Hickory Handle (Domestic)
AB408	Axe Bracket & Hook

*WHILE QUANTITIES LAST!

MUNICIPAL VALVES

Gated Wye and **Swivel Gate MUNICIPAL VALVES** are engineered from lightweight cast aluminum with powder-coated bodies and hard anodized extruded aluminum inlets/outlets for maximum performance and corrosion resistance. The **Gated Wye** also has powder-coated handles with an orange peel finish for easy gripping, while the **Swivel Gate Valve** features a non-rising stainless steel stem with aluminum hand crank for fast, trouble-free operation.

P/N	DESCRIPTION
9443	2½" NST(F) x 2½" NST(M) Alum Swivel Gate Valve
9611	2½" NST(F) x 1½" NST(M) x 1½" NST(M) Alum Gated Wye

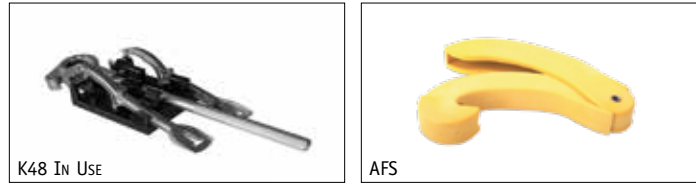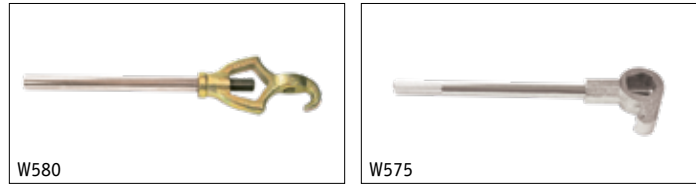




SG3012



P45SV

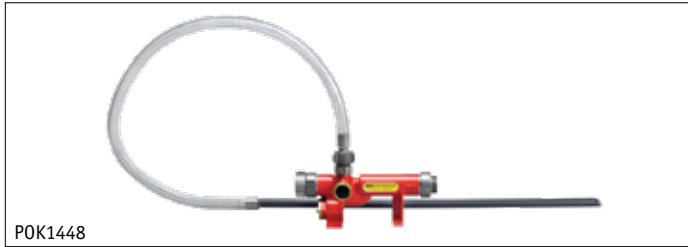

POK1448



DDPPOK9957



WBES45



36AFFF



3AFFF



6AFFF



AFOAM

MUNICIPAL NOZZLES AND FOAM EDUCTORS

Brooks' collection of **Viper FIREFIGHTING NOZZLES** includes the very best municipal nozzles available. Offered in a variety of styles, sizes, and construction, these nozzles are the professional's choice for municipal and industrial applications.

Standard Features

- E-Lite aluminum construction with brass internal parts
- Fog-to-straight stream with a twist of the bumper
- Flushable without shutting down
- Full-time NST swivels and removable pistol grips
- Constant flow through fog and straight stream

P/N	DESCRIPTION
SG3012	1 1/2" Viper Nozzle, Select gal, 30, 60, 95, 125 gpm
P45SV	1 1/2" Viper Nozzle, Constant Flow, 95 gpm

POK's IN-LINE EDUCTORS are easy to install and feature a metering knob for easy economical dispersal of 0–6% foam solutions. They are simple to maintain and have a low-pressure drop. Eductors come complete with a 10' pick-up tube and an NST inlet.

P/N	DESCRIPTION
POK1448	1 1/2" Foam Eductor, 95 gpm
POK1444	1 1/2" Foam Eductor, 125 gpm

The **POK LOW EXPANSION FOAM NOZZLE** is made of aluminum with a red **NITUFF™** finish. This 8" NST nozzle provides excellent reach and penetration with an expansion ratio of 10.

P/N	DESCRIPTION
DDPPOK9957	1 1/2" Air ASP Foam Nozzle, 95 gpm

BACKPACK EXTINGUISHING SYSTEM

The **Genfo-45 WILDLAND BACKPACK EXTINGUISHING SYSTEM** features a large 4.5 gal reservoir and internal baffle for a substantial yet stable transportable water supply. It also includes a double-action hand pump and a 40" x 1/4" hose with a fully adjustable nozzle, a carry handle, and shoulder straps for easy transportation. Weighs 4 lb empty and measures 25 1/2"H x 19 3/16"W x 1"D.

P/N	DESCRIPTION
WBES45	Genfo-45 Water Backpack
WBES45FT	Genfo-45 Foam Application Tube

CHEMICAL

Brooks carries a wide selection of **FOAM** products to meet your specific needs. The **36AFFF** is all-synthetic film-forming foam, designed for use on water-soluble polar solvents and water-insoluble hydrocarbon flammable liquids. The **3AFFF** and **6AFFF** are synthetic aqueous film-forming foam concentrates, designed for use on non-polar hydrocarbon hazards. 5 gal pails.

NOTE: TFOAM is for live fire-training sessions only.

P/N	DESCRIPTION
36AFFF	3% or 6% AR-AFFF Foam
3AFFF	3% AFFF Foam
6AFFF	6% AFFF Foam
TFOAM	3% or 6% AFFF Virtual Training Foam
AFOAM	Class A Foam